





DIMENSIONS (FT/IN)

DOMITIENNE Flex						
Height	H	13'	16'	20'	23'	26'
Overhang	L	800 - 1200 - 1500				

DOMITIENNE Flex Wall & against a pole mounting		
Overhang	L	31.5" - 47.2" - 59.1"
Weight (lbs)		37 - 51 - 55

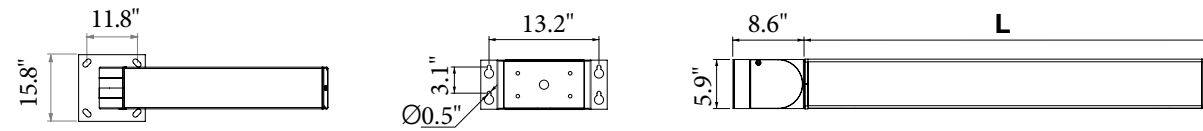

Base plate: 400x400mm • Center to center: 300x300mm
4 anchor bolts (not supplied)

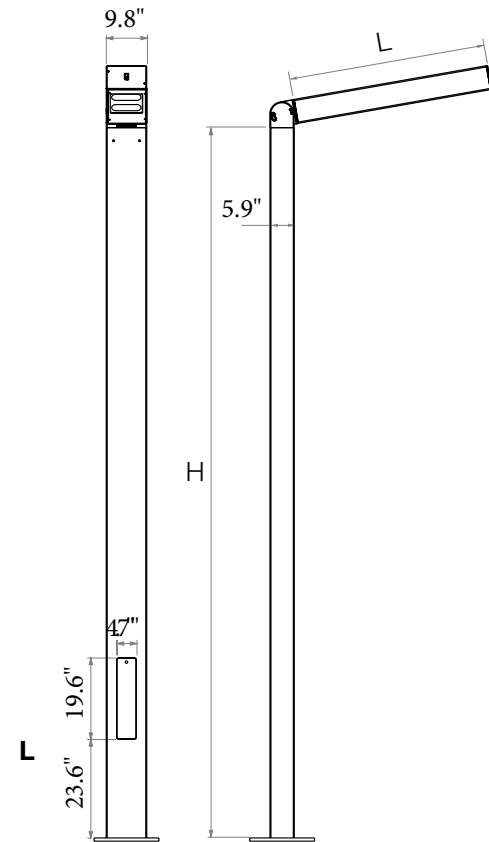

EVO2 MODULE

The EVO2 is very compact so that it can be incorporated into numerous luminaires in the Ragni range. In particular, it can replace classic reflectors (high-pressure sodium lamps, metal halide lamps...), and its compactness has made it possible to create the Ketch with its thin luminaire.



- LED manufacturer: CREE
- LED life-cycle: up to 100,000 hours
- Color temperatures: 3000K ou 4000K.
- CRI above 70

POWER AND LUMINOUS INTENSITIES PER MODULE - LUMINAIRE OUTPUT DATA

3000 K Number of LED	350 mA			500 mA			700 mA		
	P _t (W)	Φ (lm)	(lm/W)	P _t (W)	Φ (lm)	(lm/W)	P _t (W)	Φ (lm)	(lm/W)
16	21.4	1988	93	28.2	2867	102	36	3636	101
32	34.4	3976	116	48.8	5734	118	68.9	7271	106
48	51	5964	117	72.6	8601	118	102.3	10907	107

4000 K Number of LED	350 mA			500 mA			700 mA		
	P _t (W)	Φ (lm)	(lm/W)	P _t (W)	Φ (lm)	(lm/W)	P _t (W)	Φ (lm)	(lm/W)
16	21.4	2147	100	28.2	3097	110	36	3932	109
32	34.4	4294	125	48.8	6193	127	68.9	7863	114
48	51	6441	126	72.6	9290	128	102.3	11795	115

P_t (W) = Total power consumption including driver consumption • Φ Nominal flux (lm) • Luminous efficiency (lm/W)

ORDERING INFORMATION

Model	Pole Height (mm)	Head Length	# LED	CCT (K)	Drive Current	Distribution	Line Voltage	Mounting	Color
DOMF - (FIELD AJUST)									
	4000	800	16	3 - (3000K)	35 - (350 mA)	T2	120	T - (Top)	BLK - (Black)
	5000	1200	24	4 - (4000K)	50 - (500 mA)	T3	220	W - (Wall)	BRZ - (Bronze)
	6000	1500	32		70 - (700 mA)	T4	277		SLV - (Silver)
	7000		48		CUSTOM	T5	UNV		WHT - (White)
	8000								(RAL #)
	CUSTOM								






Domitienne Flex



EXAMPLES OF ENSEMBLES

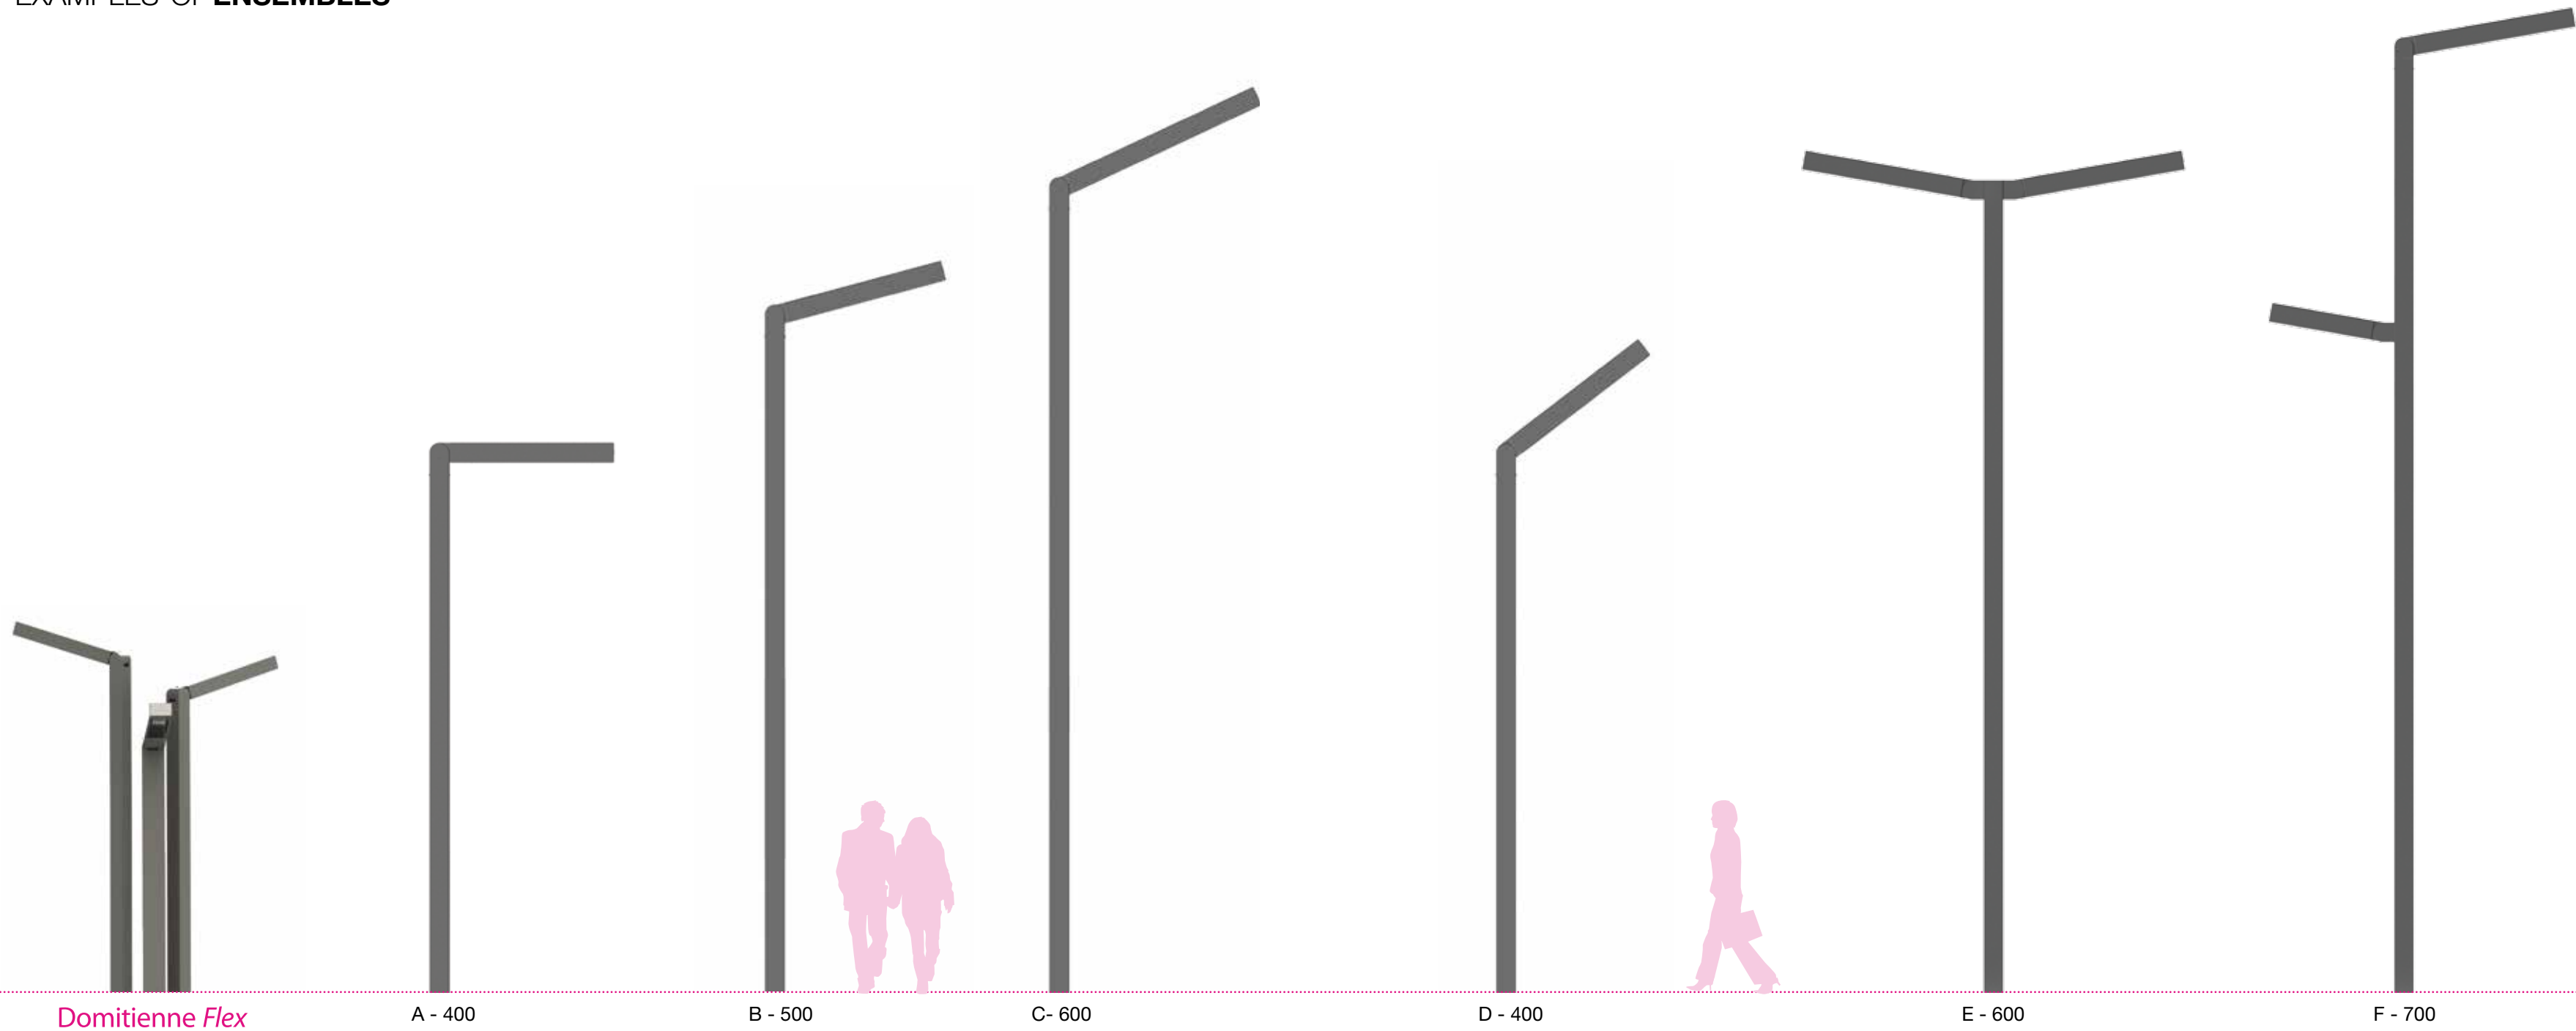

Domitienne Flex

A - 400

B - 500

C - 600

D - 400

E - 600

F - 700



Domitienne Flex

