



76

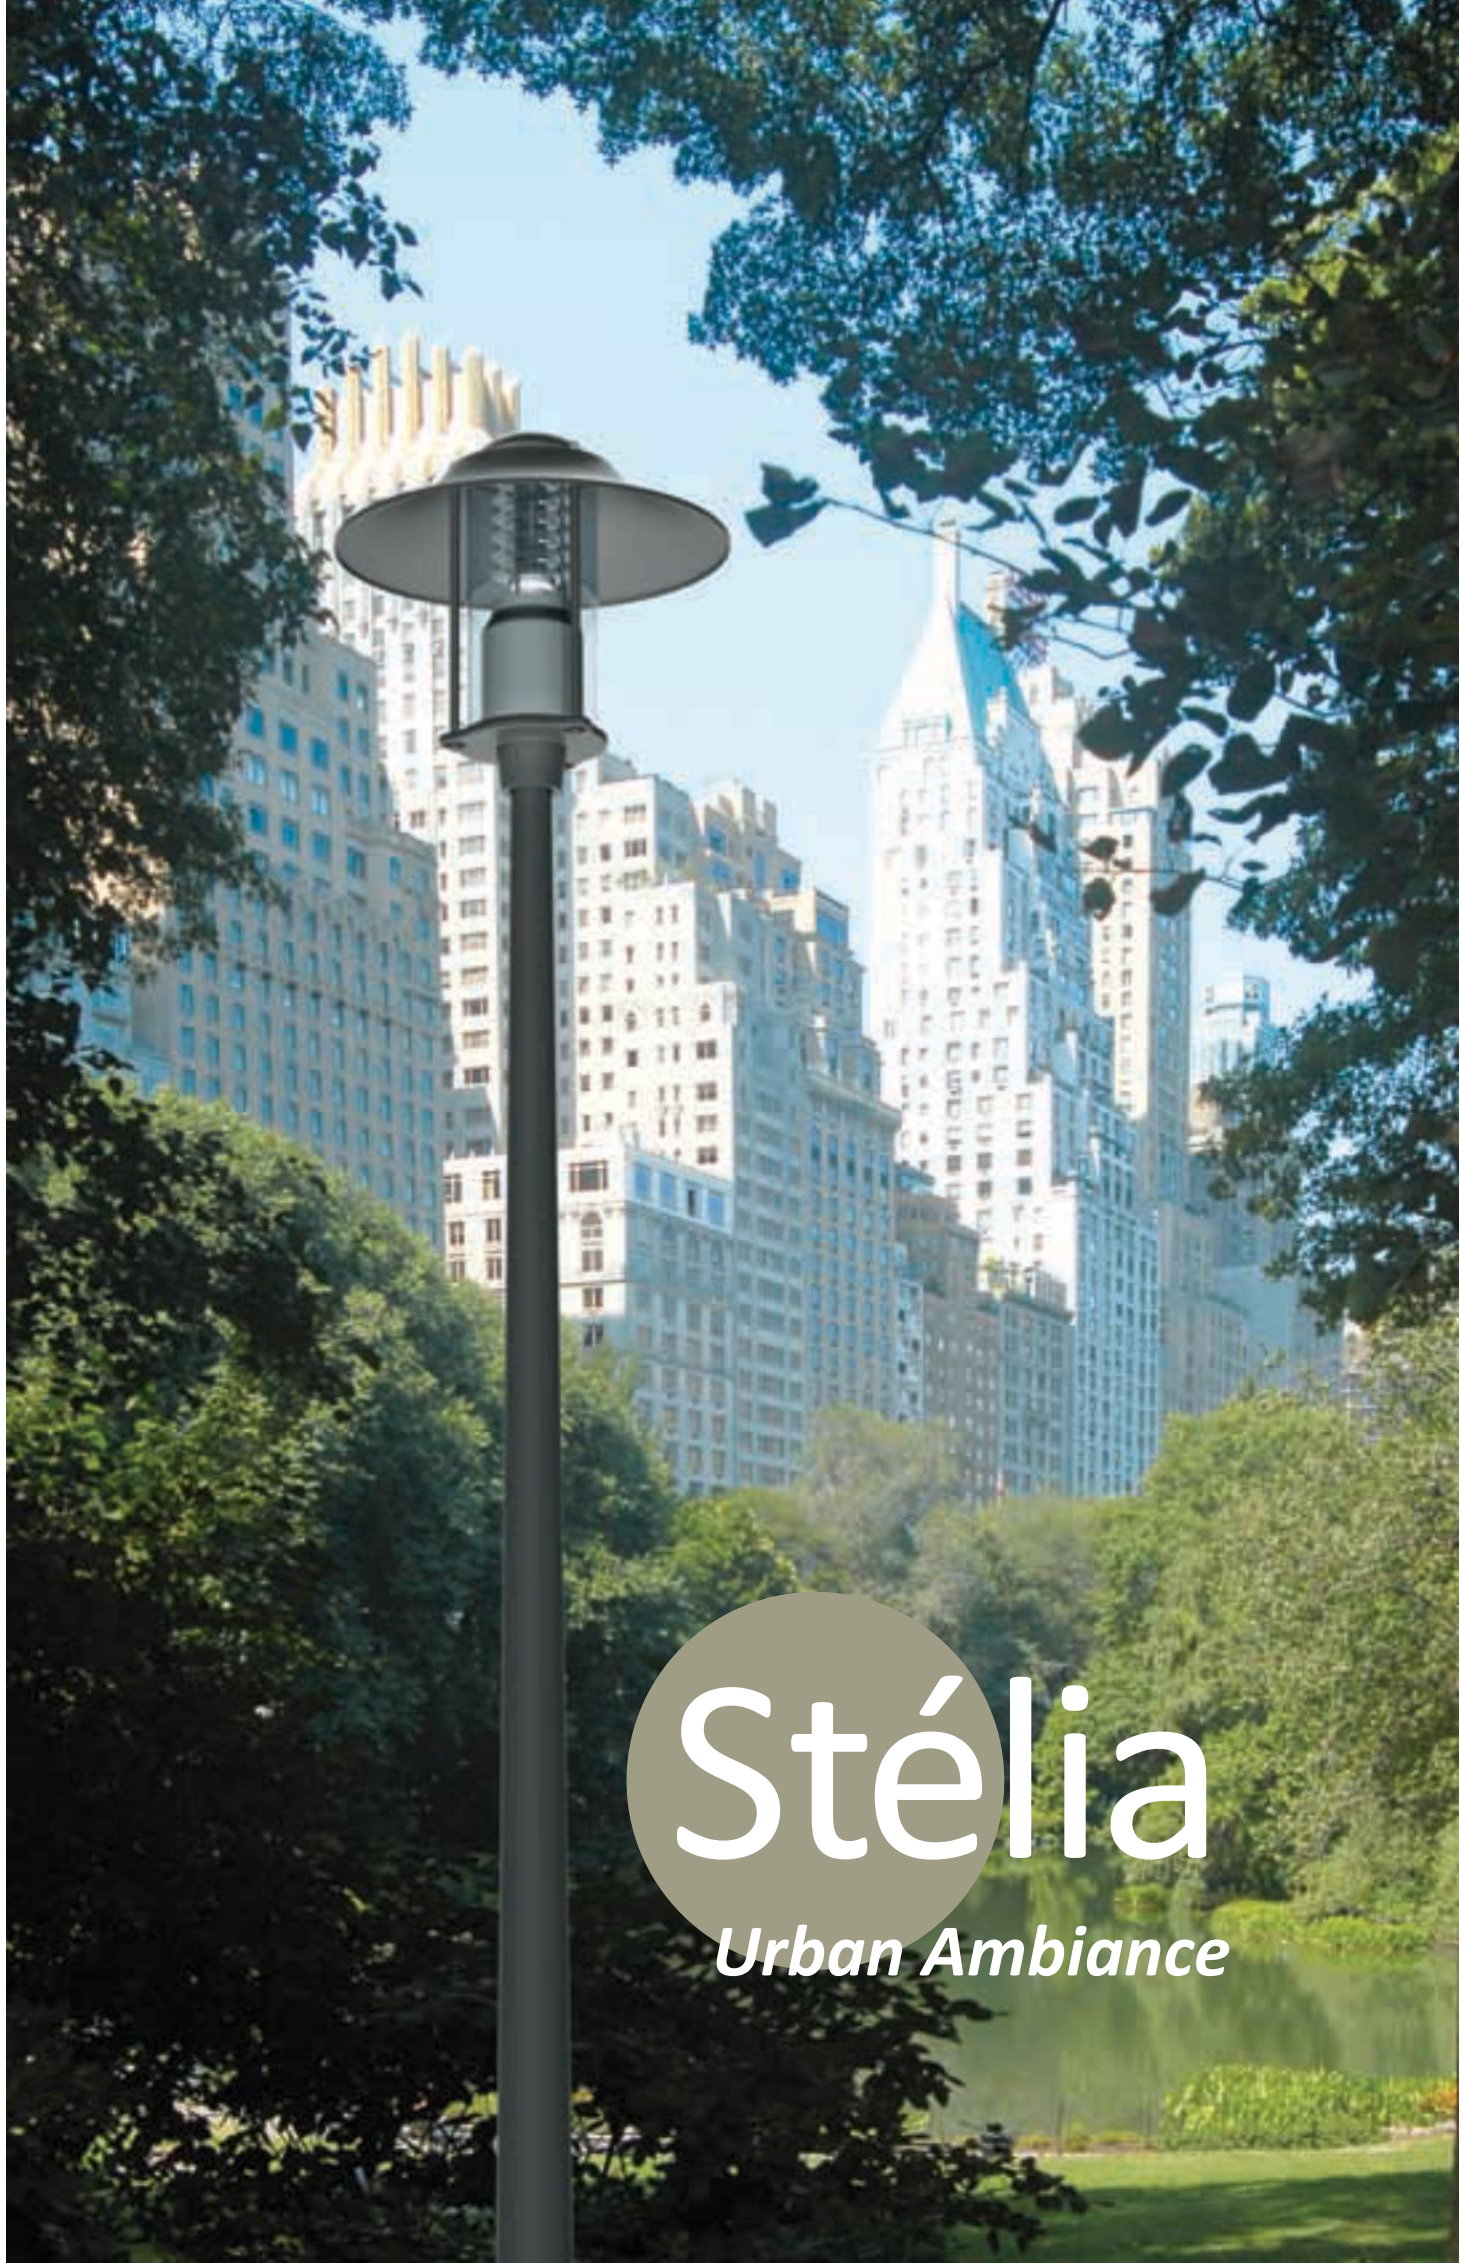

Stélia

Urban Ambiance



Stélia

Urban Ambiance

The Stélia model adds a reassuring touch of fantasy to its sober line with a curved and slightly up-turned dome. In addition to its charming visual appeal, it offers a beautiful alternative to diffusing globes. However, it's in open green spaces and residential areas that its stylish and Eco-friendly design exude its significance.

Highlights

- Replaces diffusing globes

Technical characteristics

Materials:

Canopy: embossed aluminum

Base: injected cast aluminum

Protection: ME (PC on request) extruded

Protection Shape:

Standard: Tubular

Protection Finish

Standard: Diffused white

Optional: Transparent

Optical:

AcuiSens V2

Maximum Power:


AcuiSens V2 Module: 8 LED @ 700mA

Mounting:

Top mounted Ø60 (other diameters on request) Depth of insertion: 80 mm

Color Options:

Standard colors (White, Silver, Bronze and Black), all RAL colors available upon request



Stélia

Urban Ambiance




Electrical Class

1 and 2



Concave dome

Controlgear dismantling with quarter turn

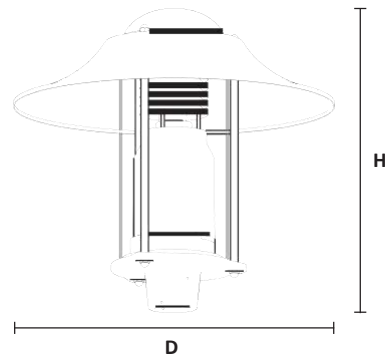


	Stélia 600	
Weight (lbs)	17.64	
EPA (ft ²)	1	
Protection Index		
Optical Unit	IP 54	(IP 65 on request)
Electrical Housing	IP 54	(IP 65 on request)
Shock Resistance	IK 08	
Dimensions (in)	D 23.62	H 23.62

Options

IP 68 Event
IK 10 on request





Stélia

Urban Ambiance

Lighting performance



AcuiSens V2 module

The AcuiSens V2 module is a compact LED module composed of 8 LEDs. Stélia uses the symmetrical distribution version. It owes its name on the one hand to the visual clarity it provides and, on the other hand, to the feeling of softness conveyed by its ambiance lighting.

- LED manufacturer: LUMILEDS
- LED life cycle: up to 100,000 hours
- Color temperatures: 3000k OR 4000k
- (other color temperatures on request)
- CRI above 70

Power and luminous intensity

3000K	350 mA			500 mA			700 mA		
	P _t (W)	Φ(lm)	(lm/W)	P _t (W)	Φ(lm)	(lm/W)	P _t (W)	Φ(lm)	(lm/W)
Number of LEDs									
8	18.5	2345	125	26.5	3320	124	38.5	4480	116

4000K	350 mA			500 mA			700 mA		
	P _t (W)	Φ(lm)	(lm/W)	P _t (W)	Φ(lm)	(lm/W)	P _t (W)	Φ(lm)	(lm/W)
Number of LEDs									
8	18.5	2460	132	26.5	3485	131	38.5	4706	122

P_t(W) = Total power consumption including driver consumption
 Φ Nominal flux (lm)
 Luminous efficiency (lm/W)

Ordering Information

Fixture	Module	Color Temp	Driving Current	Distribution	Line Voltage	Mounting	Color
STEL	AS2						
		3 – (3000 K)	35 – (350 mA)	T2	120 V	TP – (Pole Top)	BLK – (Black)
		4 – (4000 K)	50 – (500 mA)	T5	220 V		BRZ – (Bronze)
			70 – (700 mA)		277 V		SLV – (Silver)
					347 V		WHT – (White)
					480 V		(RAL #)
					UNV		



Top mounted



Stélia
Suggestions for ensembles



A - Cyl300 B - Jima 300 C - Pelas400 D - Jima 500

BRACKET Epicea



A - Wall mounting B - Cyl1500 C - Cyl1500 D - Cyl 550 Cannelia bollard

Stélia

Urban Ambiance

